
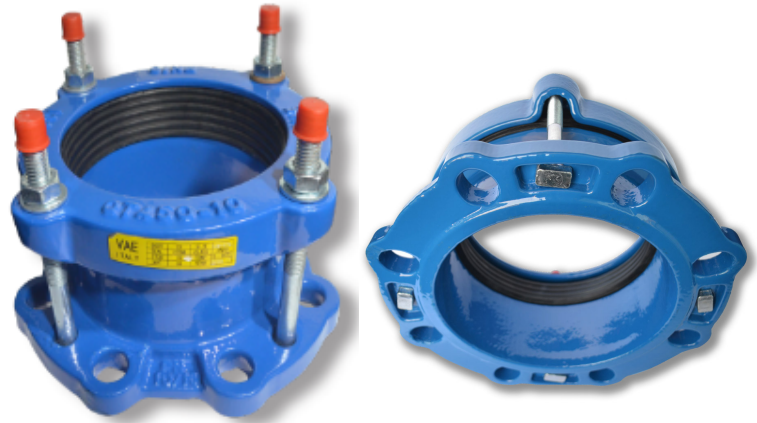


FLANGE ADAPTOR with brand of "VAE ITALY"

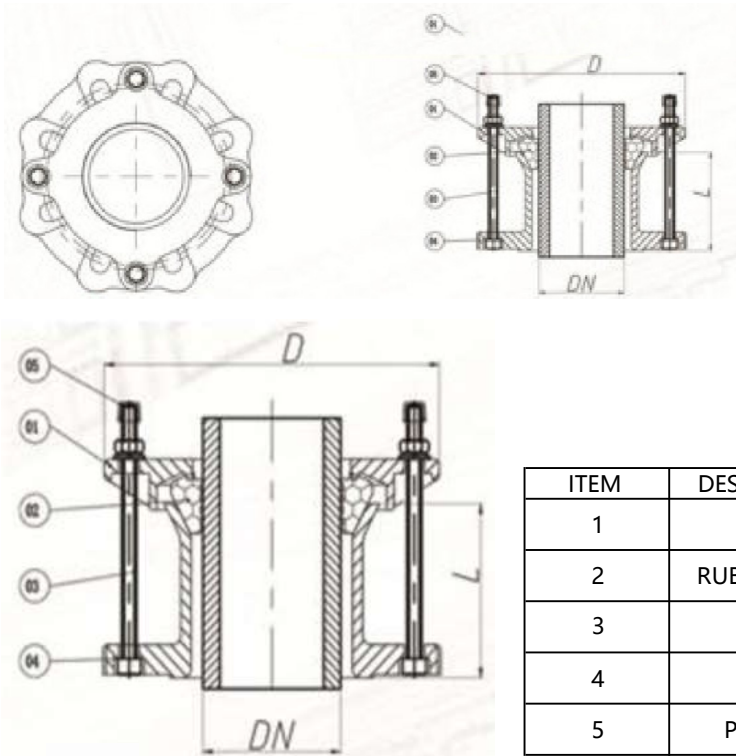

ITEM	DESCRIPTION	MATERIAL	QUANTITY
1	CAP	DUCTIL IRON	1
2	RUBBER RING	EPDM	1
3	BOLT	ZINC PLATED STEEL	N (*)
4	BODY	DUCTIL IRON	1
5	PVC CAP	PLASTIC	N

Technical Data Sheet: Ver. 1 / 2024-12-30 Approved by:
JKLONG® 宁波杰克龙精工有限公司
 NINGBO JIEKELONG PRECISION MANUFACTURING CO.,LTD.

DN	RANGE (mm)	L (mm)	D (mm)	SIZE	BOLT QTY
DN50	59-72	75	165	M12*130	2
DN65	72-85	75	185	M12*130	2
DN80	88-103	76	185	M12*130	4
DN100	93-117	78	218	M12*130	4
DN100	105-122	78	218	M12*130	4
DN100	108-128	78	218	M12*130	4
DN125	125-140	78	250	M12*130	4
DN125	132-146	78	250	M12*130	4
DN125	138-153	78	250	M12*130	4
DN150	155-175	80	272	M12*130	4
DN150	158-182	80	272	M12*130	4
DN175	192-210	85	312	M12*130	4
DN200	218-235	85	335	M12*130	4
DN225	235-252	85	355	M12*130	4
DN225	250-267	85	405	M12*130	4
DN250	265-280	90	405	M12*130	6
DN250	272-289	90	405	M12*130	6
DN300	315-332	90	460	M12*130	6
DN300	322-339	90	460	M12*130	6
DN350	351-368	110	510	M16*180	8
DN350	374-391	110	510	M16*180	8
DN350	386-415	110	510	M16*180	8
DN400	400-429	110	580	M16*180	8
DN400	410-436	110	580	M16*180	8
DN400	418-435	110	580	M16*180	8
DN400	425-442	110	580	M16*180	8
DN450	455-472	115	640	M16*180	10
DN450	476-493	115	640	M16*180	10
DN500	500-532	120	690	M16*180	10
DN500	527-544	120	690	M16*180	10
DN600	600-630	130	820	M16*180	10
DN600	630-647	130	820	M16*180	10

Briefs

- Connection for pipes in material ductile iron, steel, PVC, AC etc;
- Working pressure PN10/16;
- Maximum temperature -10°C to +70°C;
- Suitable for portable water, neutral liquids and sewage;
- WRAS approved.

Standards

- Flange: EN 1092-2;
- Coating: EN30677;
- Test: EN 12266-1.

Features

- Wide tolerance range;
- Corrosion resistant construction;
- Total angular deflection of ± 4°.

Options

- Flange drilling with BS or ANSI standard;
- GD8.8, Stainless steel, Dacromet bolt;
- Various coating;
- Seal: NBR etc.

- ◆ Flange adaptor is a connector of high elasticity, high air impermeability, medium resistance and weatherability.
- ◆ The products takes the advantage of the characteristics of elasticity, high air impermeability, medium resistance and weatherability and radiation resistance, etc of the rubber, employs the polyester tyer fabrics which is of high strength and strong cold-hot stability of oblique cross and recombine with it, finished after vulcanized by molds of high pressure and high temperature.
- ◆ Material of BODY: Ductile Iron
- ◆ This product is manufactured for CORPORACION DISTRIBUIDORA VAE E.I.R.L.

DESCRIPTION : Wide range flanged adapter for PVC pipe to ductile iron.

- Body and Counter Flange : Ductile Iron.
- Epoxy Paint Coating, 250 Microns (Internal and External).
- Rubber Ring: EPM or NBR - PN-16 (at the client's request).
- Nominal Pressure: PN10/PN16
- On request, zinc-plated Steel (*) and/or stainless steel bolts and nuts will be supplied.
- Number of bolt holes, compatible with all types of valves.